


NIN ETIK

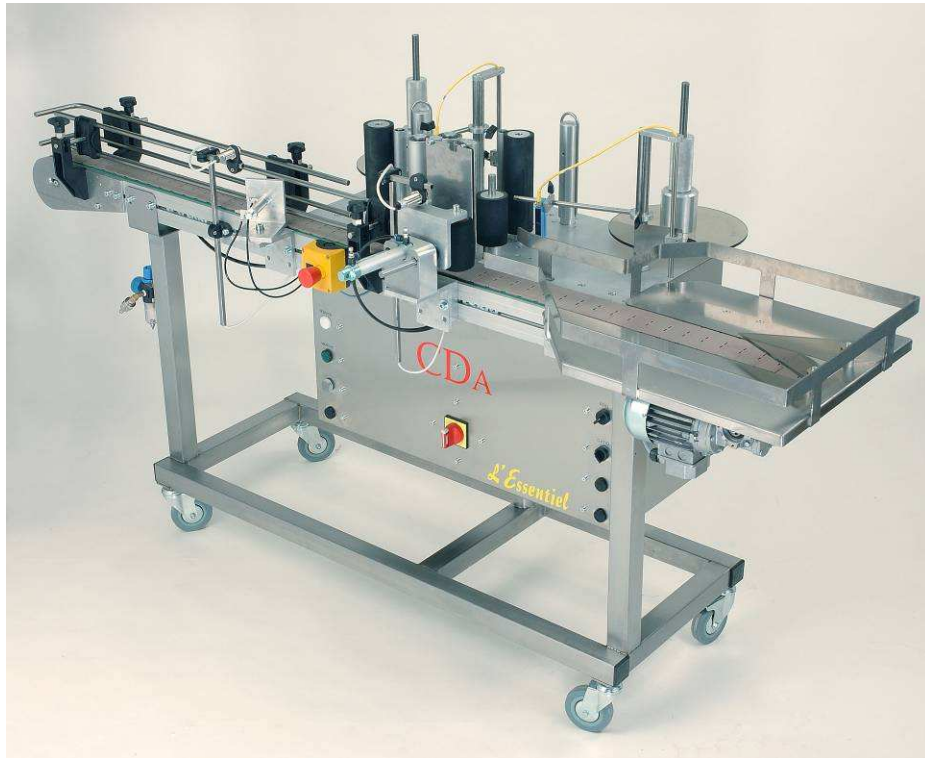

According to options machine outfitted with :

- **MOTORIZED SLATE BAND CONVEYOR**

- Anodised aluminium profile, created by CDA; receiving an acetal slate band conveyor, width 82,5 mm
- Adjustable stainless steel guides, diameter 12mm, are adjustable to allow the passage of products up to 110mm diameter
- According to the products to be labelled, a selection system is installed at the inlet of the conveyor. Either a multi-format selection screw regulated by frequency converter - or a pneumatic selector with one or two cylinders according to product size.

According to required outfit:

- A square reception table is built at the outlet of the conveyor
- A transfer system is built at the end of the conveyor


- **LABELLING**

- One labelling station to apply labels on cylindrical products up to 110 mm Ø including:
 - One label dispenser for front labels
 - One label dispenser for back labels
- The labelling height is adjusted manually.
- The label dispensers are outfitted with continuous power motor
- Machine production rate: up to 800 products an hour according to size and labelling type.

- **OPTIONS**

- A detection cell to apply an additional label on already labelled products
- A notch detection cell to apply and position labels on notched products
- Additional conveyor length
- Ink jet lot marker
- Ultrasonic label detection sensor for transparent labels
- Warranty seal folding system



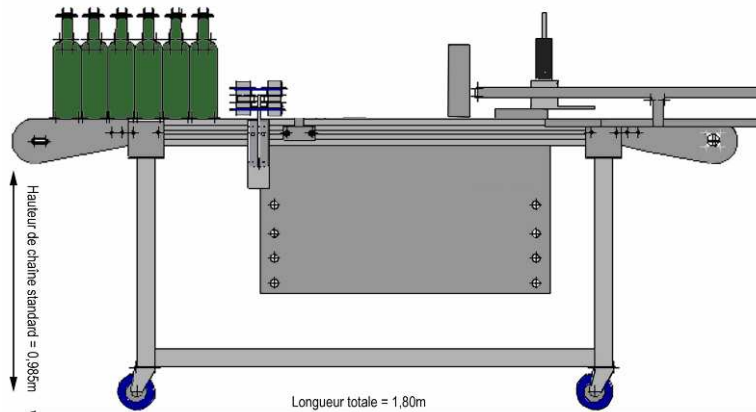

TECHNICAL DESCRIPTION	
Performance	Up to 800 bt/hour according to labelling
Approximate weight in kgs	85 kgs
Machine width	825 mm
Machine height	1205 mm
Machine length	2090 mm (according to configuration)
Conveyor height	890 mm
Control	Temporizer
Absorbed power	2kw
Power supply	380 V ~ 50 Hz 16A 3 Phases + Earth 16A 220 V ~ 50 Hz 16A
Air consumption	6 m3 / hour maxi at 4 bars – Dry air non lubricated
Ideal running temperature	from 10°C to 30°C

WINDING DIRECTION: LEFT OUT

Dimensions of the label rolls:

- A: inside diameter = 75mm
- B: Max. outside diameter = 260mm
- C: Max. band height = 190mm
- D: Space between labels = 3-5mm

Minimal paper quality: 90g

Nota: The rolls have to be stored in a dry place between 15°C and 18°C.

Machine delivered with EC Standards
* non contractual documents)

